


DUCHESNE COUNTY MONUMENT SURVEY RECORD


T3S R2W

SEC 33 | SEC 34
1/4
U.S.B.&M.

C-13



NO SCALE

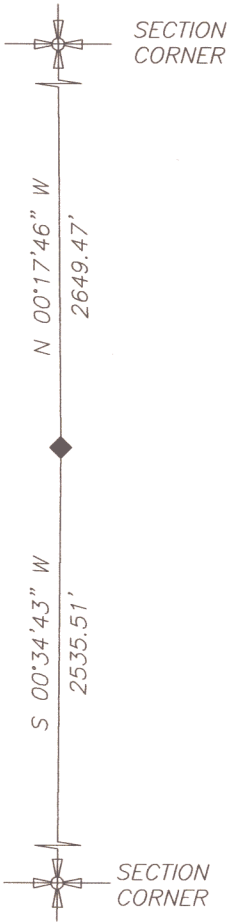

NOTE:
THE BASIS OF BEARINGS IS GEODETIC
NORTH DERIVED FROM G.P.S. OBSERVATIONS
AT A CONTROL POINT (N1/16 CORNER
SEC. 21) LOCATED AT LAT: 40°12'40.14273"N
AND LONG: 110°06'51.09603"W USING THE
UTAH STATE G.P.S. VIRTUAL REFERENCE
STATION CONTROL NETWORK MAINTAINED
AND OPERATED BY THE AUTOMATED
GEOGRAPHIC REFERENCE CENTER.

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND 5/8" REBAR WITH ALUMINUM CAP SET BY OTHERS,
AT POSITION OF 1/4 CORNER.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE
THE ORIGINAL LOCATION OF THE CORNER

REFERENCED AS SHOWN.

STATE PLANE COORDINATE DATA
(U.S. SURVEY FEET)
NAD 83 UTAH CENTRAL ZONE

N: 7236788.930
E: 2030220.369

LATITUDE: 40°10'42.649"N
LONGITUDE: 110°06'17.431"W


PUBLIC LAND SURVEY SYSTEM GCDB ID NO. UT300030S0020W0_400140

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do
hereby certify that I have performed or reviewed the work done on the
diagrammed corner as reported on this recordation form and approve same

Date 14 Nov 2011

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor



SCANNED 14 Nov 2011